

Kroma-A & AXIOM M21 User Manual



Thank you for choosing this Innokin iTaste Kroma-A Vaporizer powered by AETHON Temperature Control Technology.

For the best possible vaping experience please read, and follow, this user manual.

The iTaste Kroma-A is powered by the Ultrafast advanced AETHON chipset with 75W of pure power focused with ClearWave noise cancellation technology.

Choose your favorite Stainless Steel, Nickel200 or Titanium coils and get ready for an amazing vaping experience with no more dry hits! Pure Power, Total Control, Huge Clouds. Get ready to experience vaping excellence with the Innokin iTaste Kroma-A!

Verify	2
Warranty	2
Battery Safety	3
Quick Starter Guide	4
Integrated Safety	8
Product features	9
Technical Specifications	9

Verify your iTaste Kroma-A is an authentic Innokin Technology vaporizer:

- 1) Locate the label on the packaging and scratch the silver to reveal your iTaste Kroma-A Unique Authorization number.
- 2) Visit: <http://www.innokin.com/verify-device/>


WARRANTY INFORMATION:

Innokin Technology provides a 90 day after sales service warranty to all authorized vendors. Please consult the official Innokin website (www.innokin.com) or your Authorized Innokin Technology Vendor for more information and terms of service. The proof of purchase is needed for the 90 Day Limited Warranty.


*Except for Endura line, where we provide a 30 days warranty.

For more information and to download the warranty card please visit:
<http://www.innokin.com/innokin-90-day-limited-warranty-program/>

Battery Safety

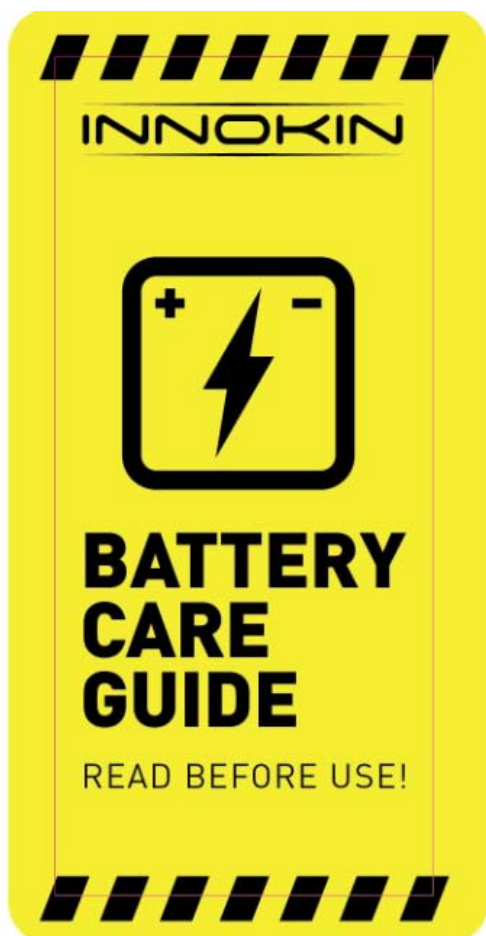


INNOKIN



**BATTERY
CARE
GUIDE**

READ BEFORE USE!

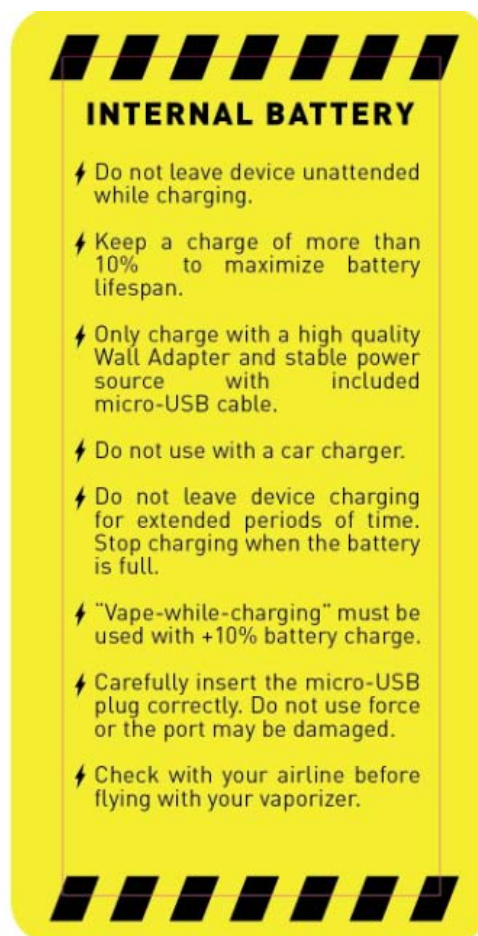

INTERNAL BATTERY

- ⚡ Do not leave device unattended while charging.
- ⚡ Keep a charge of more than 10% to maximize battery lifespan.
- ⚡ Only charge with a high quality Wall Adapter and stable power source with included micro-USB cable.
- ⚡ Do not use with a car charger.
- ⚡ Do not leave device charging for extended periods of time. Stop charging when the battery is full.
- ⚡ "Vape-while-charging" must be used with +10% battery charge.
- ⚡ Carefully insert the micro-USB plug correctly. Do not use force or the port may be damaged.
- ⚡ Check with your airline before flying with your vaporizer.

Quick Starter Guide



1 ATTACH TANK

2 UNSCREW CAP AND TOP FILL
PLEASE WAIT 5 MINUTES FOR COIL TO SATURATE.



3 3X CLICKS TO TURN ON



4 SELECT COIL



COIL TYPE 0.21Ω
SAME Ni Ti SS W

WATTAGE COIL
TEMP. COIL

W SS
Ni Ti SS

WATTAGE

RESISTANCE BATT. LIFE
0.65Ω 15.0W 0.00S
VOLTAGE WATTAGE PUFF TIME
0.00V

TEMP. CONTROL

RESISTANCE, WIRE TYPE
0.10Ni 180°C 0.00S
WATTAGE TEMP. [C OR F]
70.0W

5 ADJUST SETTINGS AS DESIRED



6 ENJOY THE VAPOR


QUICK REFERENCE GUIDE


BATTERY LIFE INDICATOR







FULL HALF LOW*



SETTINGS AND MODES

HOLD  ADJUST V/W/TEMP. UP

HOLD  ADJUST V/W/TEMP. DOWN

PRESS   FOR PRECISE READING:
RESISTANCE/VOLTS/PUFF #

HOLD   FLIP DISPLAY ORIENTATION

HOLD   MODE SELECT (Ni/Ti/SS/W)

HOLD   ADJUST RAMP UP WATTAGE IN TC MODE

SUPPORT

 facebook.com/Innokin.Technology

 instagram.com/innokintechnology

 twitter.com/innokintech


 reddit.com/r/innokin

 support@innokin.com

INTEGRATED SAFETY:


15 second cutoff:

If the “⏻” button is held for 15 seconds or longer the iTaste Kroma-A-A Advanced Personal Vaporizer LED will flash 10 times and then stop firing until the “⏻” button is released and pressed again.



Low Voltage Warning:

The Red LED and Battery bar will blink 8 times when the battery capacity is lower than 3.5V and the iTaste Kroma-A-A will automatically power off. Recharge the device immediately to maintain battery health.




Short Circuit/Atomizer Protection:

Short Circuit/Atomizer Protection protects the iTaste Kroma-A-A Advanced Personal Vaporizer against shorted atomizers and will stop the unit from functioning in unsafe conditions.

The iTaste Kroma-A-A features automatic real-time atomizer Ohms detection. If the resistance of the atomizer is lower than 0.07Ω, the LED will light solidly for 5 seconds, the Ohms bar will blink and the iTaste Kroma-A-A will not power on.

Check Atomizer:

If there is no atomizer attached, or the atomizer is not connected properly, or resistance is 3.5 Ohm or above, the OLED screen will display: “CHECK ATOMIZER”.



Over-Discharge Protection:

The iTaste Kroma-A-A Advanced Personal Vaporizer monitors battery voltage and will automatically power off if the battery is over-discharged.

Overheat Protection:

The iTaste Kroma-A-A features automatic real-time PCB Chipset temperature detection. The

screen will display "TOO HOT" if the PCB is overheated.

TOO HOT

OLED SCREEN ORIENTATION:

Hold "+" and "-" button for 3 seconds to flip the horizontal orientation of the OLED screen.

Remember last Temperature or Wattage setting:

When the iTaste Kroma-A-A is turned off it will remember the current Temperature or wattage setting and it will retain the setting when the iTasteKroma-A-A is powered back on.

Product features:

Operating Temperature Range:

150-315 °C 5°C increments

300-600 °F 5°F increments

Operating Wattage Range: 6.0- 75W .5 watt increments

Precision TemperatureControl

Direct Current – Steady Power Output

Balanced Even Coil HeatUp

Ultra-low External Heat Generation

Dry Hit Detection & Prevention

Ultra Low Standby Power Consumption

Technical Specifications

Battery: 2000mAh

Maximum output Wattage: 75W

Maximum output Current: 35.5A

Maximum working Current: 27.5A

Maximum output Voltage: 7.5V

Atomizer Resistance: 0.1Ω (Minimum)

Temperature Control Mode: Ni (0.1-0.2 Ω), Ti (0.1 -0.5 Ω)

Stainless Steel 316L (0.2-1.0 Ω) coils are recommended.

Important: Temperature Control is only available with T.C. compatible coils

Buy
Kroma-A Axiom M21